



GeForce Graphics Drivers ***Release 175 Notes***

Version 175.32

**For Windows Vista 32-bit
and Windows Vista 64-bit**

**NVIDIA Corporation
August 4, 2008**

Published by
NVIDIA Corporation
2701 San Tomas Expressway
Santa Clara, CA 95050

Notice

ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, NVIDIA Corporation assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NVIDIA Corporation. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. NVIDIA Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of NVIDIA Corporation.

Trademarks

NVIDIA, the NVIDIA logo, 3DFX, 3DFX INTERACTIVE, the 3dfx Logo, STB, STB Systems and Design, the STB Logo, the StarBox Logo, NVIDIA nForce, GeForce, NVIDIA Quadro, NVDVD, NVIDIA Personal Cinema, NVIDIA Soundstorm, Vanta, TNT2, TNT, RIVA, RIVA TNT, VOODOO, VOODOO GRAPHICS, WAVEBAY, Accuvie Antialiasing, the Audio & Nth Superscript Design Logo, CineFX, the Communications & Nth Superscript Design Logo, Detonator, Digital Vibrance Control, DualNet, FlowFX, ForceWare, GIGADUDE, Glide, GOFORCE, the Graphics & Nth Superscript Design Logo, Intellisample, M-BUFFER, nfiniteFX, NV, NVChess, nView, NVKeystone, NVOptimizer, NVPinball, NVRotate, NVSensor, NVSync, the Platform & Nth Superscript Design Logo, PowerMizer, Quincunx Antialiasing, Sceneshare, See What You've Been Missing, StreamThru, SuperStability, T-BUFFER, The Way It's Meant to be Played Logo, TwinBank, TwinView and the Video & Nth Superscript Design Logo are registered trademarks or trademarks of NVIDIA Corporation in the United States and/or other countries. Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

Intel, Indeo, and Pentium are registered trademarks of Intel Corporation. Microsoft, Windows, Windows NT, Windows Vista, Direct3D, DirectDraw, and DirectX are trademarks or registered trademarks of Microsoft Corporation. OpenGL is a registered trademark of Silicon Graphics Inc. PCI Express, PCI-SIG, and the PCI-SIG design marks are registered trademarks and/or service marks of PCI-SIG.

Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

Copyright

© 2008 by NVIDIA Corporation. All rights reserved.



Table of Contents



1. Introduction to *Release 175*

Notes

Structure of the Document	1
Changes in this Edition	1

2. Release 175 Driver Changes

Version 175.32 Highlights	4
What's New in Release 175	4
What's New in Version 175.32	4
Limitations in This Release.	5
Changes in Version 175.32	6
Fixed Issues—Windows Vista 32-bit	6
Open Issues in Version 175.32	7
NVIDIA Recommendations.	7
Windows Vista 32-bit Issues	7
Windows Vista 64-bit Issues	8
Not NVIDIA Issues	9
Windows Vista Limitations	9
Unsupported Features	10
OpenGL Application Issues	12
Application Issues	13
Operating System Issues	15

3. The Release 175 Driver

Hardware and Software Support	17
Supported Operating Systems	17
Supported NVIDIA Products	18
Supported Languages	18
Driver Installation	19
Minimum Hard Disk Space.	19
Before You Begin.	19
Installation Instructions.	19
NVIDIA Driver History	20

A. Mode Support for Windows

General Mode Support Information	22
Default Modes Supported by GPU	23
Understanding the Mode Format.	23
GeForce 8800M	24
GeForce 8700M	26
GeForce 7 Series	28
TV-Out Modes Supported	30



List of Tables



Table 3.1	Supported Notebook Products	18
Table 3.1	NVIDIA Drivers for Windows Vista	20
Table A.1	Modes Supported for High Resolution Displays	22
Table A.2	Non-standard Modes Supported	22
Table A.3	Mode Support for S-Video and Composite Out	30
Table A.4	Mode Support for Component YPrPb Out and DVI Out	30

CHAPTER

1

INTRODUCTION TO *RELEASE 175 NOTES*

This edition of *Release 175 Notes* describes the Release 175 GeForce graphics drivers for Microsoft® Windows® Vista. NVIDIA provides these notes to describe performance improvements and bug fixes in each documented version of the driver.

Structure of the Document

This document is organized in the following sections:

- “[Release 175 Driver Changes](#)” on page 3 gives a summary of changes, and fixed and open issues in this version.
- “[The Release 175 Driver](#)” on page 17 describes the NVIDIA products and languages supported by this driver, the system requirements, and how to install the driver.
- “[Mode Support for Windows](#)” on page 21 lists the default resolutions supported by the driver.

Changes in this Edition

This edition of the *Release 175 Notes* for Windows Vista includes information about NVIDIA graphics driver version 175.32, and lists changes made to the driver since version 167.51. These changes are discussed beginning with the chapter “[Release 175 Driver Changes](#)” on page 3.

CHAPTER

2

RELEASE 175 DRIVER CHANGES

This chapter describes open issues for version 175.32, and resolved issues and driver enhancements for versions of the Release 175 driver up to version 175.32. The chapter contains these sections:

- “Version 175.32 Highlights” on page 4
- “Changes in Version 175.32” on page 6
- “Open Issues in Version 175.32” on page 7
- “Not NVIDIA Issues” on page 9

Version 175.32 Highlights

This section provides highlights of version 175.32 of the NVIDIA Release 175 Driver for Windows Vista.

- [What's New in Release 175](#)
- [What's New in Version 175.32](#)
- [Limitations in This Release](#)

What's New in Release 175

- Added support for the following products:
 - GeForce 8800M GTS SLI
 - GeForce 8800M GTX SLI
- Added support for **NVIDIA GeForce 3D Stereo Technology** (Windows Vista 32-bit only).
- Added the following pages to the NVIDIA Control Panel:
 - Manage Custom Resolutions
 - Adjust Television Color Settings
 - Adjust Screen Size and Position
 - Move CRT Position
 - Adjust Video Image Settings
- NVIDIA Control Panel *Adjust Video Color Settings* page: Moved the Edge Enhancement, Noise Reduction, and Inverse Telecine controls to the new *Adjust Video Image Settings* page.

What's New in Version 175.32

New Features

- Added support for the following products:
 - GeForce 8800M GTS SLI
 - GeForce 8800M GTX SLI

Resolved Issues

See ["Changes in Version 175.32"](#) on page 6 for a list of resolved issues.

Limitations in This Release

The following are features that are not currently supported or have limited support in this driver release:

- **NVIDIA SLI Antialiasing**
- **INF Support for Restricted Timings**

This driver version does not support the use of Restricted Timing settings (R&T strings) in the INF to control mode validation and/or mode setting for custom mode/adaptor/monitor combinations. This capability is planned for a later driver release.

NVIDIA Control Panel features that are Not Yet Available

Support for the following control panel features is under development and not yet available under Windows Vista:

- **Display Category**
 - The Graph tab on the Adjust Desktop Color Settings page is not available.

Changes in Version 175.32

The following sections list the changes made and issues resolved since driver version 167.51.

- “Fixed Issues–Windows Vista 32-bit” on page 6

The NVIDIA bug number and driver module are provided for reference.

Fixed Issues–Windows Vista 32-bit

Single GPU Issues

- GeForce 8700M GT: Cyberlink Powercinema may stop responding after resuming from Hibernate mode during Blu-ray disc playback on the LVDS.[374783]
- GeForce 8700M GT: Unreal Engine L1–the LVDS becomes disabled after connecting the HDMI. [370913]
- GeForce 8700M GT: Unreal Tournament demo–the display turns black when changing the resolution. [369515]
- GeForce 8700M GT: Enemy Territory - Quake Wars–the game resumes to a black screen when returning from sleep mode. [368522]

Open Issues in Version 175.32

As with every released driver, version 175.32 of the Release 175 driver has open issues and enhancement requests associated with it. This section includes lists of issues that are either not fixed or not implemented in this version. Some problems listed may not have been thoroughly investigated and, in fact, may not be NVIDIA issues. Others may have workaround solutions.

- [“NVIDIA Recommendations”](#) on page 7
- [“Windows Vista 32-bit Issues”](#) on page 7
- [“Windows Vista 64-bit Issues”](#) on page 8

NVIDIA Recommendations

- Save and close 3D gaming applications before placing your notebook in Hibernation or Standby mode.

Windows Vista 32-bit Issues

Single GPU Issues

All GPUs

- The graphics driver installer sometimes displays an ‘incorrect operating system’ error message when trying to install on a GPU that not supported by the driver. [310188]

GeForce 8 Series GPUs

- GeForce 8800M: Age of Empire 3—the screen blinks continuously when the game resolution \geq 1920X1080. [435545]
- GeForce 8800M: Company of Heroes Opposing Fronts (DirectX 10)—the game world turns black after using Alt+tab to switch out and then back in to the game. [432679]
- GeForce 8700M: Portal—when the player is in the elevator the textures flicker and screen tearing occurs. [410538]

SLI Mode Issues

GeForce 8 Series GPUs

- [SLI], GeForce 8800M: World in Conflict—the Drop Zone flashes solid green after switching to Megamap with graphics detail set to Very Low. [421459]
- [SLI], GeForce 8700M: Supreme Commander: Forged Alliance—the health bars flicker and bleed. [420248]

- [SLI], GeForce 8700M: Universe At War—the game crashes when changing the resolution during gameplay. [411867]
- [SLI], GeForce 8800M/8700M: Chronicles of Riddick:Escape from Butcher Bay– the screen has flashing black bars when entering a room in game that has a flashing ceiling light. [410585]
- [SLI], GeForce 8700M GT: Company of Heroes Opposing Fronts—with SLI mode enabled, ground textures flicker when closing the tactical map with shadows turned on. [369873]
- [SLI], GeForce 8700M GT: Crysis single-player demo—with SLI mode enabled, the mouse cursor does not match the mouse location on the main menu. [368271]

GeForce 7 Series GPUs

- [SLI], GeForce 7950 GTX/7900 GS: Rainbow Six Vegas—with SLI enabled and HDR on, flickering black squares appear on or near character models. [368619]

Windows Vista 64-bit Issues

Single GPU Issues

- GeForce 8700M GT: With an external HDTV connected via component out in Clone mode, the LVDS display gets corruption when changing the HD format from 1080i to 480p or 720p. [373387]

SLI Mode Issues

- [SLI], GeForce 8800M/8700M: Chronicles of Riddick:Escape from Butcher Bay– the screen has flashing black bars when entering a room in game that has a flashing ceiling light. [410585]
- [SLI]. GeForce 8800M/7950 GTX/7900 GS: Sid Meier's Railroads—there is tearing when scanning the terrain. [420762]

Not NVIDIA Issues

This section lists issues that are not due to the NVIDIA driver as well as features that are not meant to be supported by the NVIDIA driver for Windows Vista.

- “Windows Vista Limitations” on page 9
- “Unsupported Features” on page 10
- “OpenGL Application Issues” on page 12
- “Application Issues” on page 13
- “Operating System Issues” on page 15

Windows Vista Limitations

These are behaviors that may be different from Windows XP and are related directly to the Windows Vista operating system.

- **NVIDIA TurboCache**

Windows Vista now controls the allocation of system memory to the GPU for TurboCache functions. The Windows Vista Display Properties pages show the shared system memory (SSM), or how much memory is allocated for NVIDIA GPUs to use for TurboCache.

For more information on graphics memory reporting under Windows Vista, visit <http://www.microsoft.com/whdc/device/display/graphicsmemory.mspx>.

Unsupported Features

The following are features and functionality that were available in driver releases supporting Windows XP, but are not—and will not be—available in driver releases for Windows Vista:

- **High resolution scaling desktop (HRSD)**
- **MultiView Display Mode** (for NVIDIA Quadro NVS graphics cards)
- **NVKeystone**
- **Unified back buffer (UBB) controls**
- **OpenGL Video Overlays**

This is an operating system limitation.

Vista window manager features will provide new ways of accomplishing overlays, but will require application porting.

- **Overclocking**

GPU overclocking is no longer supported in the default GPU driver control panel. This feature is available in the NVIDIA nTune 5.05 software, which you can download from NVIDIA.com.

- **GPU Temperature Monitoring**

Temperature monitoring is no longer supported in the default GPU driver control panel. This feature is available in the NVIDIA nTune 5.05 software, which you can download from NVIDIA.com.

- **AGP Settings Adjustment**
- **Full-screen Video Mirror**
- **Video Zoom**

- **Pan & Scan** - the process of panning across the desktop in order to display a desktop on a monitor with lower resolution

- **Per-display Desktop Color Setting Adjustments**

For Clone mode, the desktop color setting adjustments through the NVIDIA Control Panel can only be made across all displays in a system, and not on a per-display basis.

- **Per-display Video Color Setting Adjustment**

For Dualview mode, the video color setting adjustments through the NVIDIA Control Panel can only be made across all displays in a system, and not on a per-display basis.

- **Edge Blending**
- **Run display optimization wizard**

- **Run multiple display wizard**
- **Run television setup wizard**
- **nView Horizontal and Vertical Span Modes**

Due to architectural changes in the new Windows Vista Window Display Driver Model (WDDM), span mode cannot be supported in NVIDIA graphics drivers. NVIDIA recommends using the built-in Windows Vista multi-display modes.

- **Display/Connection Wizard** (such as was provided with Windows Media Center Edition)
- **DVD/MPEG Extensions** (such as was provided with Windows Media Center Edition)
- **Audio Extensions** (such as was provided with Windows Media Center Edition)
- **Windowed quad-buffered stereo**

This is an operating system limitation.

- **NVIDIA nView Desktop Manager**

The nView Desktop Manager will not be included in drivers for GeForce products.

OpenGL Application Issues

The following are known compatibility issues for OpenGL applications developed under Windows XP:

- Mixed GDI and OpenGL rendering does not work.

A number of applications use GDI to render UI components and object highlighting. This is not supported in the Windows Vista driver model.

NVIDIA recommends converting GDI rendering to OpenGL.

The following are some applications that are known to have this issue:

- Maya 7.01
- OneSpace Designer Modeling
- Applications, Tools, and Benchmarks not Supported Under Windows Vista
 - GLperf
 - 3ds max 8 (later releases may be supported)
 - CATIA V5R15 (V5R16 is supported)
 - PTC's CDRS 2001
- Front buffered rendering may be slow, especially when DWM is enabled.

Flushing the rendering queue while rendering to the front buffer may cause the window manager to recomposite. Applications should therefore minimize the frequency with which they flush the rendering queue.

Application Issues

- **General Antialiasing Problem with Top Games**

We have found that some games running under Windows Vista enable 16x coverage sampling antialiasing (CSAA) when 4xAA is selected in the game menu, resulting in deflated performance on GeForce 8800 cards.

The problem occurs with NVIDIA Vista drivers 100.54 and later.

The same effect will occur in future "Release 100" Windows XP drivers.

Affected applications found to date include:

- Battlefield 2
- Battlefield 2142
- Sin Episodes
- Half-Life 2
- Half-Life 2 Lost Coast

To set standard 4xAA in these applications, please set 4xAA in the game, and also enable "Enhance the application" antialiasing mode with a 4x antialiasing setting in the NVIDIA graphics driver control panel.

We are working with developers to implement better in-game CSAA support. You can see CSAA menu selections in Half-Life 2: Episode One and Supreme Commander.

- Tiger Woods PGA Tour 2007–Fly-by shot before each hole blacks-out textures. [274697]

NVIDIA is working with the developer to resolve this issue.

- City of Heroes–The mouse cursor does not display. [259256]

This is an application issue that can be worked around in full-screen mode by adding "compatiblecursors 1" to the City of Heroes desktop shortcut.

NVIDIA is pursuing a fix with the application developer.

- Need for Speed Carbon–After upgrading with patch 1.3, the game crashes when launched. [290506]

This is an issue with the application patch under Windows Vista.

- Nascar Simracing–the game crashes when launched. [270792]

This is an issue with the application under Windows Vista.

- Call of Duty 2–Only solid colors render during game play when 4xAA is enabled. [257454]

The application is not applying antialiasing properly. Please try selecting 2x AA, disabling antialiasing, or using NVIDIA Enhanced application or Override antialiasing modes.

NVIDIA is pursuing a fix with the application developer

- Age of Empires III—the game has rendering artifacts, such as textured squares for smoke. [258036]
- Flight Simulator X—pressing Alt+Tab to switch to the desktop does not work. [293729]
- Everquest 2— with NVIDIA driver versions 100.xx, the following error message appears: [273346]

"You currently have a (7.15.11.120) video card installed. We recommend that you download version 7772 drivers before playing Everquest."

This occurs because the application is not checking the driver version correctly, but this does not affect game play. Please select "Continue Anyway" to launch the game. The problem does not occur with a previous Release 95 driver (xx.xx format).

NVIDIA is pursuing a fix with the application developer.

- GeForce 8 Series: Quake 4—there are white flashing artifacts. [273476]
- Battlefield 2—the game crashes to desktop when set to 1900x1440 resolution 8x antialiasing. [322008]

This problem occurs only when you have FRAPS 2.6.4 installed. It does not occur with FRAPS 2.8.2

- 316403 GeForce 8 Series, GeForce 7 Series: NV SDK 9.5 Mandelbrot set fails to render fractal.

This is an issue with the NV SDK and will be fixed in a newer build.

- GeForce 8 Series: Prince of Persia—half the screen turns black and the other half turns white during resolution changes. [299484]

This is an issue with the application.

- GeForce 8700M GT: Lego Star Wars II—the application crashes when the system resumes from lid-close sleep mode. [364484]

This is an issue with the application.

Application Issues Under SLI Mode

- [SLI]: NVIDIA SLI scaling on some applications under Windows Vista may not be as much as under Windows XP. Some applications include "S.T.A.L.K.E.R., Half-Life 2: Lost Coast, Company of Heroes, Battlefield 2142, Call of Duty 2, Hitman: Blood Money, and Far Cry. [302534 290803]

This is an application issue which has been resolved with the latest Steam patch.

Operating System Issues

- World of Warcraft – there is a 60% drop in performance when running the game in windowed mode with SLI or multi-GPU mode enabled. [289427]

This is due to a limitation of the Windows Vista operating system and affects all multi-GPU systems. NVIDIA is investigating a workaround for this performance problem.

- When S-video and DVI displays are set up in Clone mode and rotated 90 degrees, the screen turns black.[304267, 283546]

This is an issue with the operating system.

CHAPTER

3

THE RELEASE 175 DRIVER

This chapter covers the following main topics:

- “Hardware and Software Support” on page 17
- “Driver Installation” on page 19
- “NVIDIA Driver History” on page 20

Hardware and Software Support

Supported Operating Systems

The Release 175 driver, version 175.32, has been tested with Microsoft Windows® Vista RTM OS builds version 6000 or higher, and supports both 32-bit and 64-bit versions of Windows Vista Editions:

- Windows Vista Home Basic
- Windows Vista Home Premium
- Windows Vista Business
- Windows Vista Enterprise Edition
- Windows Vista Ultimate

Supported NVIDIA Products

Table 3.1 lists the NVIDIA products supported by the Release 175 driver, version 175.32

Table 3.1 Supported Notebook Products

Manufacturer	Model	GPU
Alienware	Area-51 m9750	GeForce Go 7950 GTX SLI
Alienware	Area-51 m9750	GeForce 8700M GT SLI
Dell	XPS M1730	GeForce 8800M GTX SLI
Dell	XPS M1730	GeForce 8800M GTS SLI
Dell	XPS M1730	GeForce 8700M GT SLI
Dell	XPS M1710	GeForce Go 7900 GTX
Dell	XPS M1710	GeForce Go 7950 GTX
Dell	XPS M1710	GeForce Go 7900 GS

Supported Languages

The Release 175 GeForce Graphics Drivers supports the following languages in the main driver Control Panel:

English (USA)	German	Portuguese (Euro/Iberian)
English (UK)	Greek	Russian
Arabic	Hebrew	Slovak
Chinese (Simplified)	Hungarian	Slovenian
Chinese (Traditional)	Italian	Spanish
Czech	Japanese	Spanish (Latin America)
Danish	Korean	Swedish
Dutch	Norwegian	Thai
Finnish	Polish	Turkish
French	Portuguese (Brazil)	

Driver Installation

Minimum Hard Disk Space

The hard disk space requirement is minimum 37.1 MB for English-only, and 64.9 MB for International.

Before You Begin

If you have previously installed NVIDIA nTune, NVIDIA recommends that you uninstall nTune before installing this driver. After the driver install is complete, you can reinstall NVIDIA nTune.

Installation Instructions

- 1 Follow the instructions on the NVIDIA .com Web site driver download page to locate the appropriate driver to download, based on your hardware and operating system.
- 2 Click the driver download link.
- 3 The license agreement dialog box appears.
- 4 Click **Accept** if you accept the terms of the agreement, then either open the file or save the file to your PC and open it later.
- 5 Extract the zip files to a temporary folder on your PC.
- 6 Open the NVIDIA driver installation .EXE file to launch the NVIDIA InstallShield Wizard.
- 7 Follow the instructions in the NVIDIA InstallShield Wizard to complete the installation.

Note: After the driver installation, Windows may default to 16-bpp color and disable the Desktop Window Manager (DWM). To work around this issue, set the color to 32-bpp and then reboot the PC.

NVIDIA Driver History

Release 175 is the latest NVIDIA driver available. [Table 3.1](#) contains a summary of some previous driver releases and the versions associated with them. Some versions listed may not have been released outside of NVIDIA.

Table 3.1 NVIDIA Drivers for Windows Vista

Windows Vista Build	NVIDIA ForceWare Driver
RTM OS Builds 6000 or higher	Release 175: Version 175.32
RTM OS Builds 6000 or higher	Release 167: Version 167.51

APPENDIX



MODE SUPPORT FOR WINDOWS

This chapter details the Windows modes supported by the Release 175 driver for NVIDIA products. It contains these sections:

- “General Mode Support Information” on page 22
- “Default Modes Supported by GPU” on page 23
- “TV-Out Modes Supported” on page 30

General Mode Support Information

The NVIDIA graphics driver includes a standard list of display modes that are supported by default. These modes are listed in the section [“Default Modes Supported by GPU”](#) on page 23.

The actual modes available depend on the capabilities of the display. In addition, the NVIDIA graphics driver has a “dynamic EDID detection” capability and will make available *additional* modes that are listed in the display EDID, provided the graphics hardware can support it.

The NVIDIA graphics driver also supports the high resolutions available with the displays listed in [Table A.1](#) as well as the non-standard modes listed in [Table A.2](#).

Table A.1 Modes Supported for High Resolution Displays

Display	Maximum Resolution	Hardware Requirements
Apple 30" Cinema HD Display (Dual link DVI)	2560x1600 @ 60 Hz	All GeForce 7 series GPUs and later
Dell WFP 3007 (Dual Link DVI)	2560x1600 @ 60 Hz	
HP LP3065 dual-link DVI flat panel	2560x1600 @ 60Hz.	

Table A.2 Non-standard Modes Supported

Resolution
1680 x 1050
1366 x 768

Default Modes Supported by GPU

This section lists the modes that are included by default in the driver INF for the following product families:

- “GeForce 8800M” on page 24
- “GeForce 8700M” on page 26
- “GeForce 7 Series” on page 28

Understanding the Mode Format

Figure A.1 gives an example of how to read the mode information presented in this section.

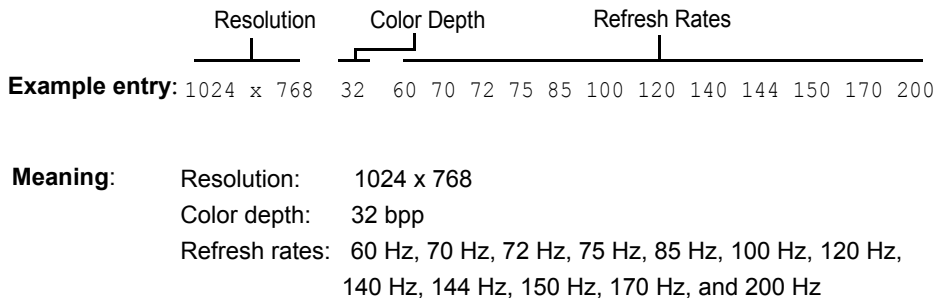


Figure A.1 Mode Format

Note:

- Horizontal spanning modes of 3840x1080 and above, and vertical spanning modes of 1920x2160 and above generally require at least 32 MB of video memory at 32 bpp.
- An “i” next to the refresh rate indicates an interlaced refresh rate.

GeForce 8800M

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA GeForce 8800M GTS
- NVIDIA GeForce 8800M GTX

Standard Modes

640 x 480	8	60
800 x 600	8	60 70 75 85 100
848 x 480	8	60 70 75 85 100
1024 x 768	8	60 70 75 85 100
1152 x 864	8	60 70 75 85 100
1280 x 768	8	60
1280 x 960	8	60 70 75 85 100
1280 x 1024	8	60 70 75 85 100
1600 x 1200	8	60 70 75 85 100
1920 x 1200	8	60
1920 x 1440	8	60 70 75 85 100
2048 x 1536	8	60 70 75 85 100

640 x 480	16	60
800 x 600	16	60 70 75 85 100
848 x 480	16	60 70 75 85 100
1024 x 768	16	60 70 75 85 100
1152 x 864	16	60 70 75 85 100
1280 x 768	16	60
1280 x 960	16	60 70 75 85 100
1280 x 1024	16	60 70 75 85 100
1600 x 1200	16	60 70 75 85 100
1920 x 1200	16	60
1920 x 1440	16	60 70 75 85 100
2048 x 1536	16	60 70 75 85 100

640 x 480	32	60
800 x 600	32	60 70 75 85 100
848 x 480	32	60 70 75 85 100
1024 x 768	32	60 70 75 85 100

1152 x	864	32	60	70	75	85	100
1280 x	768	32	60				
1280 x	800	32	60				
1280 x	960	32	60	70	75	85	100
1280 x	1024	32	60	70	75	85	100
1360 x	768	32	60				
1600 x	1200	32	60	70	75	85	100
1920 x	1200	32	60				
1920 x	1440	32	60	70	75	85	100
2048 x	1536	32	60	70	75	85	100

640 x	480	64	60				
800 x	600	64	60	70	75	85	100
848 x	480	64	60	70	75	85	100
1024 x	768	64	60	70	75	85	100
1152 x	864	64	60	70	75	85	100
1280 x	768	64	60				
1280 x	800	64	60				
1280 x	960	64	60	70	75	85	100
1280 x	1024	64	60	70	75	85	100
1360 x	768	64	60				
1600 x	1200	64	60	70	75	85	100
1920 x	1200	64	60				
1920 x	1440	64	60	70	75	85	100
2048 x	1536	64	60	70	75	85	100

GeForce 8700M

This sections lists the supported display resolutions, color depths, and refresh rates for the following product:

- NVIDIA GeForce 8700M GT

Standard Modes

640 x 480	8	60
800 x 600	8	60 70 75 85 100
848 x 480	8	60 70 75 85 100
960 x 600	8	60 70 75 85 100
1024 x 768	8	60 70 75 85 100
1152 x 864	8	60 70 75 85 100
1280 x 768	8	60
1280 x 800	8	60
1280 x 960	8	60
1280 x 1024	8	60 70 75 85 100
1360 x 768	8	60
1600 x 1200	8	60 70 75 85 100
1920 x 1200	8	60
1920 x 1440	8	60 70 75 85 100
2048 x 1536	8	60 70 75 85 100

640 x 480	16	60
800 x 600	16	60 70 75 85 100
848 x 480	16	60 70 75 85 100
960 x 600	16	60 70 75 85 100
1024 x 768	16	60 70 75 85 100
1152 x 864	16	60 70 75 85 100
1280 x 768	16	60
1280 x 800	16	60
1280 x 960	16	60
1280 x 1024	16	60 70 75 85 100
1360 x 768	16	60
1600 x 1200	16	60 70 75 85 100
1920 x 1200	16	60
1920 x 1440	16	60 70 75 85 100
2048 x 1536	16	60 70 75 85 100

640 x 480	32	60						
800 x 600	32	60	70	75	85	100		
848 x 480	32	60	70	75	85	100		
960 x 600	32	60	70	75	85	100		
1024 x 768	32	60	70	75	85	100		
1152 x 864	32	60	70	75	85	100		
1280 x 768	32	60						
1280 x 800	32	60						
1280 x 960	32	60						
1280 x 1024	32	60	70	75	85	100		
1360 x 768	32	60						
1600 x 1200	32	60	70	75	85	100		
1920 x 1200	32	60						
1920 x 1440	32	60	70	75	85	100		
2048 x 1536	32	60	70	75	85	100		

640 x 480	64	60						
800 x 600	64	60	70	75	85	100		
848 x 480	64	60	70	75	85	100		
960 x 600	64	60	70	75	85	100		
1024 x 768	64	60	70	75	85	100		
1152 x 864	64	60	70	75	85	100		
1280 x 768	64	60						
1280 x 800	64	60						
1280 x 960	64	60						
1280 x 1024	64	60	70	75	85	100		
1360 x 768	64	60						
1600 x 1200	64	60	70	75	85	100		
1920 x 1200	64	60						
1920 x 1440	64	60	70	75	85	100		
2048 x 1536	64	60	70	75	85	100		

GeForce 7 Series

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA GeForce Go 7950 GTX
- NVIDIA GeForce Go 7900 GTX
- NVIDIA GeForce Go 7900 GS

Standard Modes

640 x 480	8	60
800 x 600	8	60 70 75 85 100
848 x 480	8	60 70 75 85 100
960 x 600	8	60 70 75 85 100
1024 x 768	8	60 70 75 85 100
1152 x 864	8	60 70 75 85 100
1280 x 768	8	60
1280 x 800	8	60
1280 x 960	8	60 70 75 85 100
1280 x 1024	8	60 70 75 85 100
1360 x 768	8	60
1600 x 1200	8	60 70 75 85 100
1920 x 1200	8	60
1920 x 1440	8	60 70 75 85 100
2048 x 1536	8	60 70 75 85 100

640 x 480	16	60
800 x 600	16	60 70 75 85 100
848 x 480	16	60 70 75 85 100
960 x 600	16	60 70 75 85 100
1024 x 768	16	60 70 75 85 100
1152 x 864	16	60 70 75 85 100
1280 x 768	16	60
1280 x 800	16	60
1280 x 960	16	60 70 75 85 100
1280 x 1024	16	60 70 75 85 100
1360 x 768	16	60
1600 x 1200	16	60 70 75 85 100
1920 x 1200	16	60

1920 x 1440	16	60	70	75	85	100
-------------	----	----	----	----	----	-----

2048 x 1536	16	60	70	75	85	100
-------------	----	----	----	----	----	-----

640 x 480	32	60				
-----------	----	----	--	--	--	--

800 x 600	32	60	70	75	85	100
-----------	----	----	----	----	----	-----

848 x 480	32	60	70	75	85	100
-----------	----	----	----	----	----	-----

960 x 600	32	60	70	75	85	100
-----------	----	----	----	----	----	-----

1024 x 768	32	60	70	75	85	100
------------	----	----	----	----	----	-----

1152 x 864	32	60	70	75	85	100
------------	----	----	----	----	----	-----

1280 x 768	32	60				
------------	----	----	--	--	--	--

1280 x 800	32	60				
------------	----	----	--	--	--	--

1280 x 960	32	60	70	75	85	100
------------	----	----	----	----	----	-----

1280 x 1024	32	60	70	75	85	100
-------------	----	----	----	----	----	-----

1360 x 768	32	60				
------------	----	----	--	--	--	--

1600 x 1200	32	60	70	75	85	100
-------------	----	----	----	----	----	-----

1920 x 1200	32	60				
-------------	----	----	--	--	--	--

1920 x 1440	32	60	70	75	85	100
-------------	----	----	----	----	----	-----

2048 x 1536	32	60	70	75	85	100
-------------	----	----	----	----	----	-----

TV-Out Modes Supported

Table A.3 and Table A.4 list the NTSC, PAL, and HDTV TV-Out modes supported by the NVIDIA driver.

Table A.3 Mode Support for S-Video and Composite Out

Resolution	Bit depth	Comments
320x200	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
320x240	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x400	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x480	8, 16, 32	
720x480	8, 16, 32	Overscans (for video)
720x576	8, 16, 32	Overscans (for video)
800x600	8, 16, 32	
1024x768	8, 16, 32	Conexant 25871 only

Table A.4 Mode Support for Component YPrPb Out and DVI Out

Resolution	Comments
480i (SDTV)	Supported on graphics boards with Conexant 875 or Philips 7108 TV encoders and compatible connectors, and compatible GeForce 6 Series and GeForce 7 Series GPUs.
480p (EDTV)	
720p (HDTV)	
1080i (HDTV)	
576i (PAL)	
576p (PAL)	

The driver supports manual overscan correction for component and DVI outputs. See the NVIDIA Control Panel online help for instructions on how to use the overscan correction features in the control panel.